

# Billiard Cue Repair Lathe Cnc Vtl Ck5112 Single Turret Type 1600mm

# **Basic Information**

Place of Origin: Henan, China
Brand Name: Baishun
Certification: CE ISO
Model Number: CK5112
Minimum Order Quantity: 1 Set

• Price: \$22,500.00/sets 1-2 sets

Packaging Details: Export standard wooden case package or

Negotiation with customers

• Delivery Time: 30-35 work days

Payment Terms: L/C, T/T, Western Union
 Supply Ability: 100 Set/Sets per Month



# **Product Specification**

 Max. Length Of Workpiece 2000 (mm):

Max. Spindle Speed (r.p.m):200 R.p.mMachining Capacity: Medium Duty

Spindle Bore(mm): 105Width Of Bed (mm): 250 MmSpindle Motor Power(kW): 22

Travel (Z Axis)(mm): 650 Mm
Toolpost Brand: Hongda
Max. Processing Diameter: 1200mm
Max. Height Work Piece: 2000mm

Highlight: bullard cnc vtl, Billiard Cue Lathe,

billiard cue repair lathe



# More Images









### **Product Description**

#### **Product Description**

#### Hot Sale Lathe Machine Cnc Machining Parts Cnc Wheel Lathe

Hot Sale Lathe Machine Cnc Machining Parts Cnc Wheel Lathe is suitable to process ferrous metal, nonferrous metals and partial non-metallic material, and could achieve the processing of turning of the end face, inside and outside cylindrical surface, inside and outside circular conical surface and drilling, expanding, reaming of hole. Main transmission is driven by the spindle AC servo motor, hydraulic gear change and two gears step less speed regulation. Worktable is manual 4-jaw single movement chuck.

### Key Features:

- 1. Our CNC vertical lathe is equipped with the Siemens 828DD system, ensuring precise control. It features a vertical tool post, allowing for a maximum machining diameter of 1600mm, a table diameter of 1400mm, and a maximum machining height of 1000mm.
- 2. The transmission device adopts a four-speed continuous transmission, providing convenience, sensitivity, and reliability.
- 3. All gears in the system are made of 40Cr grinding gears, guaranteeing high rotation accuracy and minimal noise.
- 4. This machine is suitable for processing non-ferrous metals, black metals, and non-metallic materials using high-speed steel tools and carbide cutting tools. It can perform various operations, including turning inner and outer cylindrical surfaces, cutting different types of faces (such as hooks), inner and outer conical surfaces, threading, as well as slotting and cutting.


The CNC vertical lathe is a top-performing machine with a wide range of capabilities and high productivity. Our company has developed a cutting-edge machine tool that seamlessly integrates animatronics and hydraulics, drawing inspiration from advanced design and manufacturing techniques, and incorporating our rich corporate culture. This allows us to deliver world-class products to both domestic and international customers.

Please note that we are constantly striving to enhance our products, and therefore, the information provided may be subject to change without prior notice.

#### Machine parameter

Model	CK518	CK5112Q	CK5112A	CK5116Q	CK5120A	CK5126A
Max. turning diameter of vertical tool rest (mm)	800	1200	1200	1600	2000	2600
Working table diameter (mm)	700	1000	1000	1400	1800	2200
Max. height of work-piece (mm)	800	1000	1000	1200	1250	1400
Max. weight of work-piece (kg)	1500	1500	3200	3200	8000	8000
Range of worktable rotation speed (rpm)	30-260	20-180	6.3-200	15-160	3.2-100	2.2-70
Feeding series	Stepless	Stepless	Stepless	Stepless	Stepless	Stepless
Range of tool rest feed (mm/min)	0.25-90	0.25-90	0.8-86	0.25-90	0.8-86	0.8-86
Cross beam travel (mm)	500	1000	650	1200	890	1090
Horizontal travel of tool rest (mm)	500	700	700	900	1115	1400
Vertical travel of tool rest (mm)	450	500	650	750	800	800
Size of section of cutter bar (mm)	30*40	30*40	30*40	30*40	30*40	30*40
Main motor power (kw)	11	15	22	15	30	30



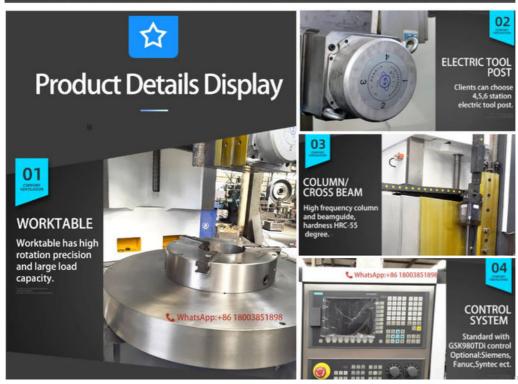

+8618939515188

sale@goodlathe.com



athemach.com

No.65, Tianming Road, Jinshui District, Zhengzhou City, Henan Province, China